


B.193-SST-p

Boutons moletés

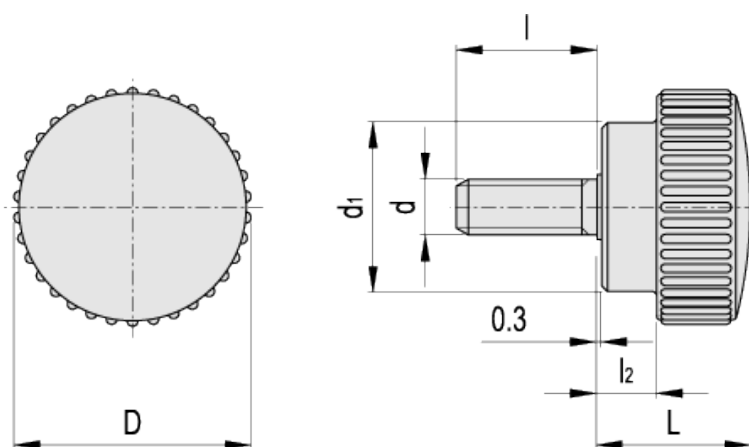

Elesa Standards		Dimensions principales				Tige filetée		Poids
Code	Description	D	L	d ₁	l ₂	d _{6g}	l	g
102121	B.193/15-SST-p-M4x6	15	11	11	2	M4	6	3
102122	B.193/15-SST-p-M4x10	15	11	11	2	M4	10	4
102123	B.193/15-SST-p-M4x16	15	11	11	2	M4	16	5
102321	B.193/20-SST-p-M6x10	22	14	15	4	M6	10	9
102322	B.193/20-SST-p-M6x16	22	14	15	4	M6	16	10
102421	B.193/25-SST-p-M6x16	26	19	18	6	M6	16	14
102422	B.193/25-SST-p-M6x25	26	19	18	6	M6	25	16

Matière

Matière plastique thermodurcissable à base phénolique (PF). Résistant aux solvants, aux huiles, aux graisses et autres agents chimiques.

Couleur

Noir, finition brillante.

Exécution standard

Tige filetée en acier INOX AISI 303, extrémité à bout émoussé selon le tableau UNI 947 : ISO 4753 (voir les [Données Techniques](#)).

