







# RS-775SH/SF

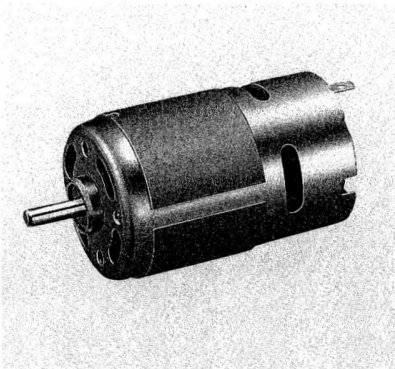

DIRECTION OF ROTATION



UNIT: MILLIMETERS

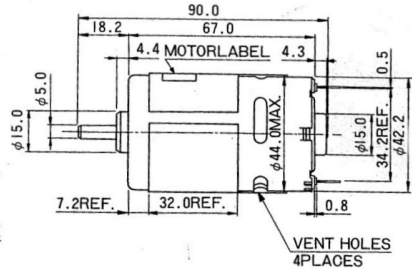

WEIGHT: 320g (APPROX.)

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY						STALL TORQUE	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	STALL TORQUE	STALL TORQUE
			rpm	A			oz-in	g-cm				
RS-775SH-4047	12.0~30.0	24.0V CONSTANT	10300	0.4	9010	2.79	7.85	565.0	52.2	78.0	62.5	4500
RS-775SH-6021	6.0~20.0	12.0V CONSTANT	11550	1.0	10000	6.40	7.74	557.6	57.2	74.0	57.6	4150
RS-775SH-7513	4.5~15.0	6.0V CONSTANT	9300	1.5	8020	9.37	7.00	503.8	41.4	73.7	50.7	3650
		12.0V CONSTANT	18800	2.0	16160	12.3	9.36	673.8	111.7	76.0	66.7	4800

※冷却用ファン内蔵の機種 (RS-775SF) もあります

※ RS-775SF (with built in cooling fan) is also available

